



Augenti<sup>®</sup>  
LIGHTING

# MODDO FLOODLIGHT





PROJECT  
YOUR  
DESIRES

**MODO** FLOODLIGHT



# MODO Floodlight

**Forme semplici** e dimensioni compatte sono il cuore della collezione proposta. Il design minimal **si adatta facilmente** a qualunque architettura **rispondendo ad ogni esigenza progettuale**. Modo è un sistema in grado di evolvere e, grazie alle **differenti ottiche**, proiettare i vostri desideri.

La struttura in **alluminio pressofuso**, il rivestimento con elevate caratteristiche tecniche, **diffusore in vetro temperato e viti in acciaio inox A2**, sono soltanto alcune caratteristiche del **KNOW-HOW tecnico** che racchiude la collezione.

**Simple shapes** and compact dimensions are the heart of the proposed collection. The minimal design **easily adapts** to any architecture, **responding to every design requirement**. Modo is a system able to evolve and, thanks to the **different optics**, project your desires. The **die-cast aluminum** structure, the coating with high technical characteristics, **tempered glass diffuser and A2 stainless steel screws**, are just some of the characteristics of the **technical KNOW-HOW** that encompasses the collection.

**Des formes simples** et des dimensions compactes sont au cœur de la collection proposée. Le design minimal **s'adapte facilement** à n'importe quelle architecture, **répondant à toutes les exigences de conception**. Modo est un système capable d'évoluer et, grâce aux **différentes optiques**, de projeter vos envies.

La structure en **aluminium moulé sous pression**, le revêtement à hautes caractéristiques techniques, **le diffuseur en verre trempé et les vis en acier inoxydable A2** ne sont que quelques-unes des caractéristiques du **SAVOIR-FAIRE technique** qui englobe la collection.

FLOODLIGHT

MODO





# MODO Floodlight

Module VERTICAL EMISSION



MODO 610W

NB

Spot/12°

MB

Flood/28°

WB

Wide Flood/50°

BB

Single Straight Blade/4°

light DIFFUSION

MODO  
610W





# Fixture Specifications

Protection . IP 65 - IK 07

Body . Die-cast aluminium

Screen . Tempered Extra-clear Glass 4mm with silk-screen printing

Seals . Closed-cell EPDM rubber

Screws . Stainless steel A2

Paint / Finishing . Anti-corrosive UV stabilised polyester powder

## MODO 610W

Module VERTICAL EMISSION - led WHITE

LED SYSTEM WITH BUILT-IN DRIVER

| code                 | beam                        | class | W    | source | fixture | CCT LED | CRI |
|----------------------|-----------------------------|-------|------|--------|---------|---------|-----|
| <b>610W1</b> /WP70NB | NB Single/12°               | I     | 8W   | 790 lm | 662 lm  | 3000 K  | 80  |
| <b>610W1</b> /NP70NB | NB Single/12°               | I     | 8W   | 900 lm | 741 lm  | 4000 K  | 80  |
| <b>610W1</b> /WP70MB | MB Single/28°               | I     | 8W   | 790 lm | 656 lm  | 3000 K  | 80  |
| <b>610W1</b> /NP70MB | MB Single/28°               | I     | 8W   | 900 lm | 738 lm  | 4000 K  | 80  |
| <b>610W1</b> /WP70WB | WB Single/50°               | I     | 8W   | 790 lm | 643 lm  | 3000 K  | 80  |
| <b>610W1</b> /NP70WB | WB Single/50°               | I     | 8W   | 900 lm | 726 lm  | 4000 K  | 80  |
| <b>610W1</b> /WP70BB | BB Single Straight Blade/4° | I     | 3.5W | 260 lm | 237 lm  | 3000 K  | 80  |
| <b>610W1</b> /NP70BB | BB Single Straight Blade/4° | I     | 3.5W | 300 lm | 278 lm  | 4000 K  | 80  |

## Finishes

00  
PURE WHITE  
RAL 9016

01  
BLACK  
RAL 9005

10  
WHITE  
RAL 9010

24  
BRONZE

25  
RUST


30  
ANTHRACITE

35  
SLATE GREY

40  
GREY  
RAL 9006

## Assembly

Alimentazione / Main Supply

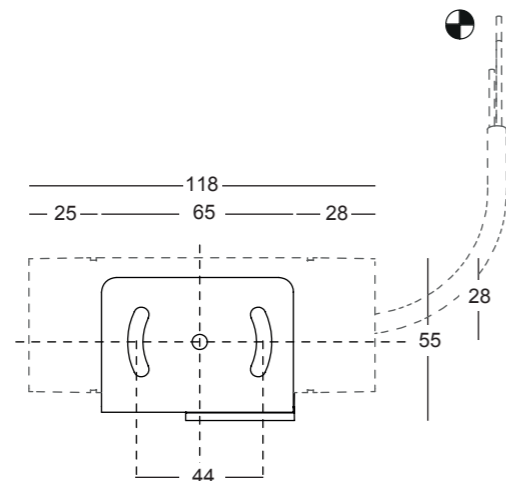

## Application



Residential areas








Cycle  
Pedestrian paths



Access areas



Parks  
Gardens

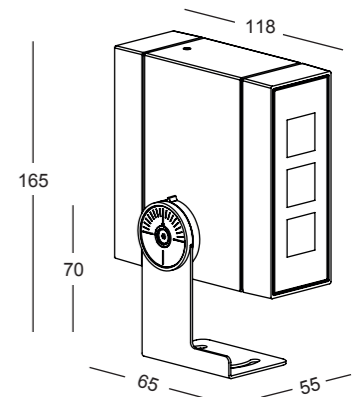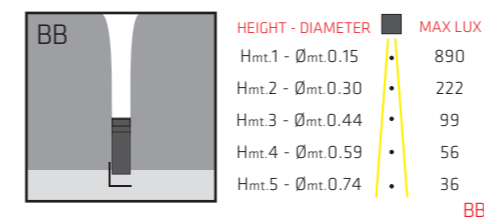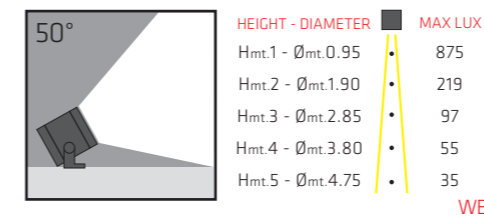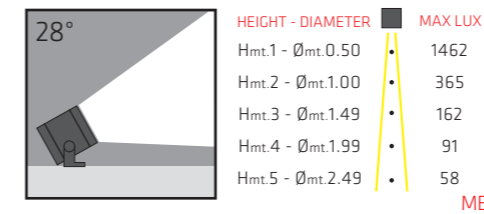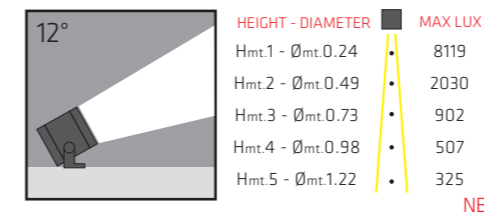

Sizes . H 165 x L 55 x W 118



Assembly / Usage  
Wall-Ground-Ceiling installation



## Specifications



Input Supply 220-240Vac 50/60Hz



different optics  
different projects  
different system



**MODDO** 610W

BEAM **NB** **MB** **WB** **BB**



# MODDO

610W

BB

Single Straight Blade/4°




# MODO Floodlight

Module HORIZONTAL EMISSION



MODO 611W

MODO  
611W

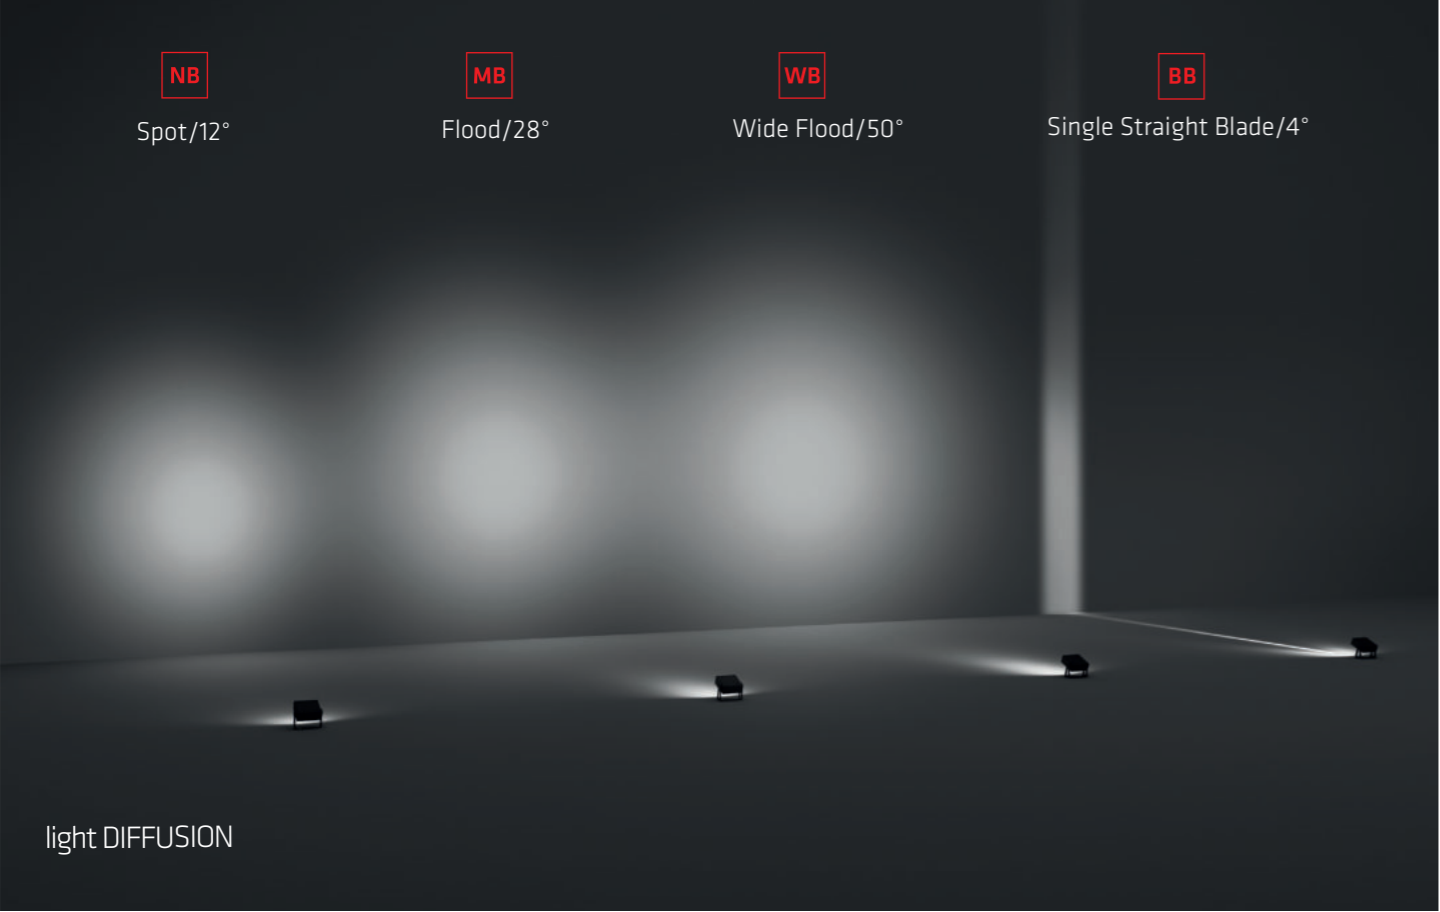

NB

Spot/12°

MB

Flood/28°

WB

Wide Flood/50°

BB

Single Straight Blade/4°

light DIFFUSION





# Fixture Specifications

Protection . IP 65 - IK 07

Body . Die-cast aluminium

Screen . Tempered Extra-clear Glass 4mm with silk-screen printing

Seals . Closed-cell EPDM rubber

Screws . Stainless steel A2

Paint / Finishing . Anti-corrosive UV stabilised polyester powder

## MODO 611W

Module **HORIZONTAL EMISSION** - led WHITE

**LED SYSTEM WITH BUILT-IN DRIVER**

| code                 | beam                        | class | W    | source | fixture | CCT LED | CRI |
|----------------------|-----------------------------|-------|------|--------|---------|---------|-----|
| <b>611W1</b> /WP70NB | NB Single/12°               | I     | 8W   | 790 lm | 662 lm  | 3000 K  | 80  |
| <b>611W1</b> /NP70NB | NB Single/12°               | I     | 8W   | 900 lm | 741 lm  | 4000 K  | 80  |
| <b>611W1</b> /WP70MB | MB Single/28°               | I     | 8W   | 790 lm | 656 lm  | 3000 K  | 80  |
| <b>611W1</b> /NP70MB | MB Single/28°               | I     | 8W   | 900 lm | 738 lm  | 4000 K  | 80  |
| <b>611W1</b> /WP70WB | WB Single/50°               | I     | 8W   | 790 lm | 643 lm  | 3000 K  | 80  |
| <b>611W1</b> /NP70WB | WB Single/50°               | I     | 8W   | 900 lm | 726 lm  | 4000 K  | 80  |
| <b>611W1</b> /WP70BB | BB Single Straight Blade/4° | I     | 3.5W | 260 lm | 237 lm  | 3000 K  | 80  |
| <b>611W1</b> /NP70BB | BB Single Straight Blade/4° | I     | 3.5W | 300 lm | 278 lm  | 4000 K  | 80  |




## Finishes

|                                     |                                |                                |                               |
|-------------------------------------|--------------------------------|--------------------------------|-------------------------------|
| <b>00</b><br>PURE WHITE<br>RAL 9016 | <b>01</b><br>BLACK<br>RAL 9005 | <b>10</b><br>WHITE<br>RAL 9010 | <b>24</b><br>BRONZE           |
| <b>25</b><br>RUST                   | <b>30</b><br>ANTHRACITE        | <b>35</b><br>SLATE GREY        | <b>40</b><br>GREY<br>RAL 9006 |



## Assembly

Alimentazione / Main Supply

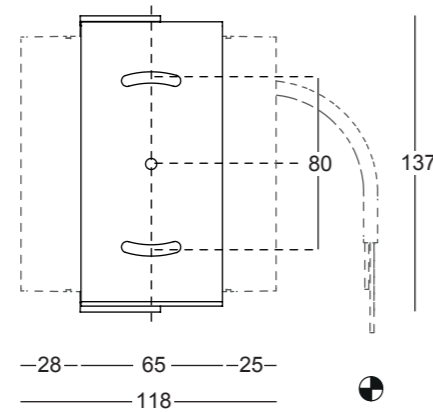

## Application

|                   |                        |              |               |
|-------------------|------------------------|--------------|---------------|
| Residential areas | Cycle Pedestrian paths | Access areas | Parks Gardens |
|-------------------|------------------------|--------------|---------------|

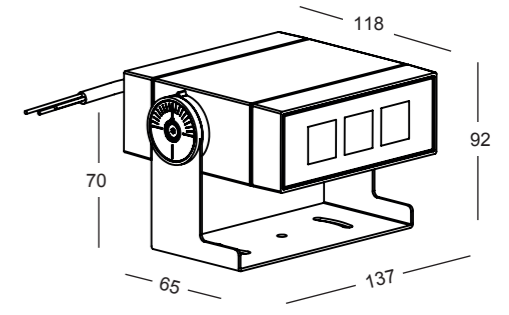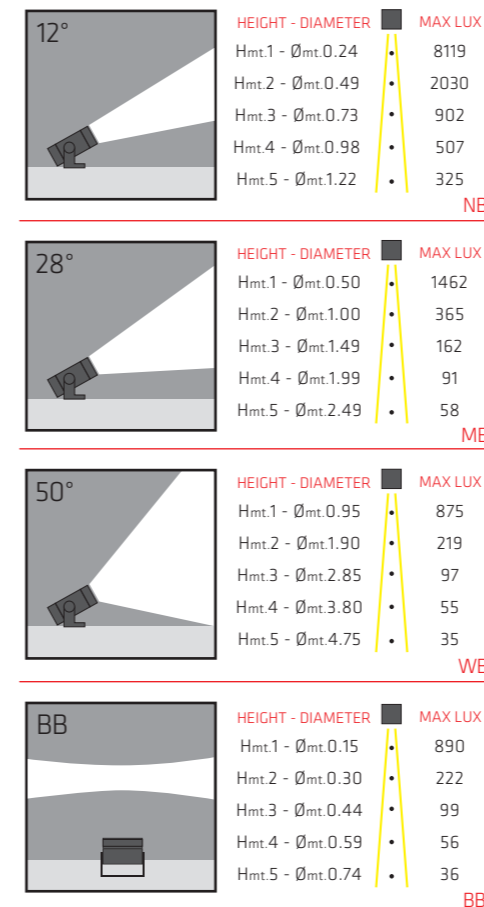

Sizes . H 92 x L 137 x W 118

Assembly / Usage  
Wall-Ground-Ceiling installation



## Specifications



Input Supply 220-240Vac 50/60Hz



die-cast aluminum  
tempered glass  
stainless steel screws

**MODDO** 611W

BEAM **NB** **MB** **WB** **BB**





# MODDO

611W

WB

Wide Flood/50°





**MODO**Floodlight

GOOD

INSTALLATION

BY **Augenti**<sup>®</sup>  
LIGHTING DESIGN






# Augenti®

LIGHTING DESIGN

FRAMON GROUP

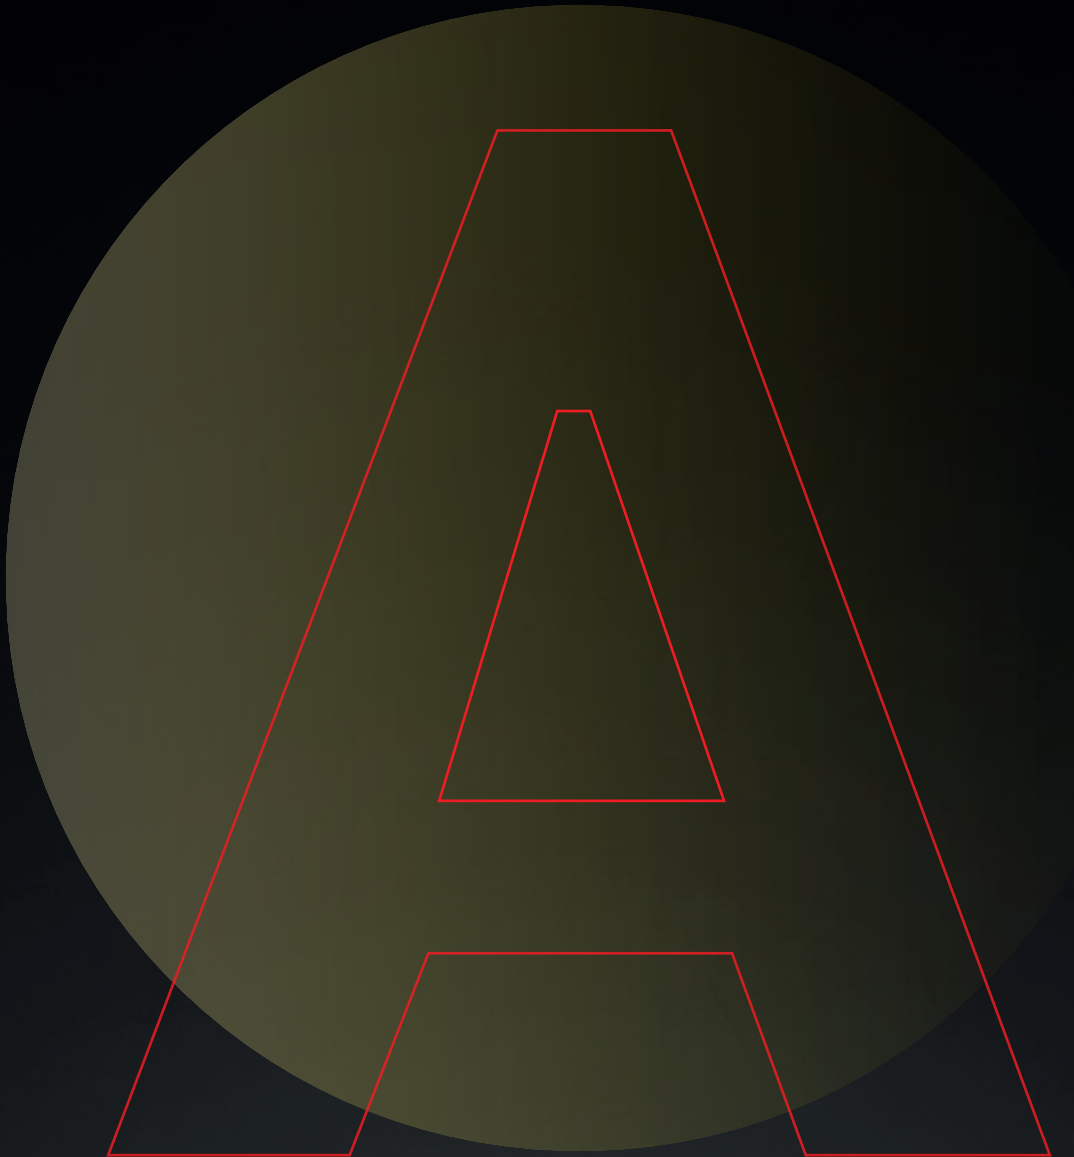

**AUGENTI LIGHTING S.R.L. UNIPERSONALE**

Via Francesco Lana, 31 - 25065 Lumezzane (BS) Italy - tel: (+39) 030 7282524 - fax: (+39) 030 7281879  
info@augentilighting.it - www.augentilighting.it