




Augenti[®]
LIGHTING



RIM

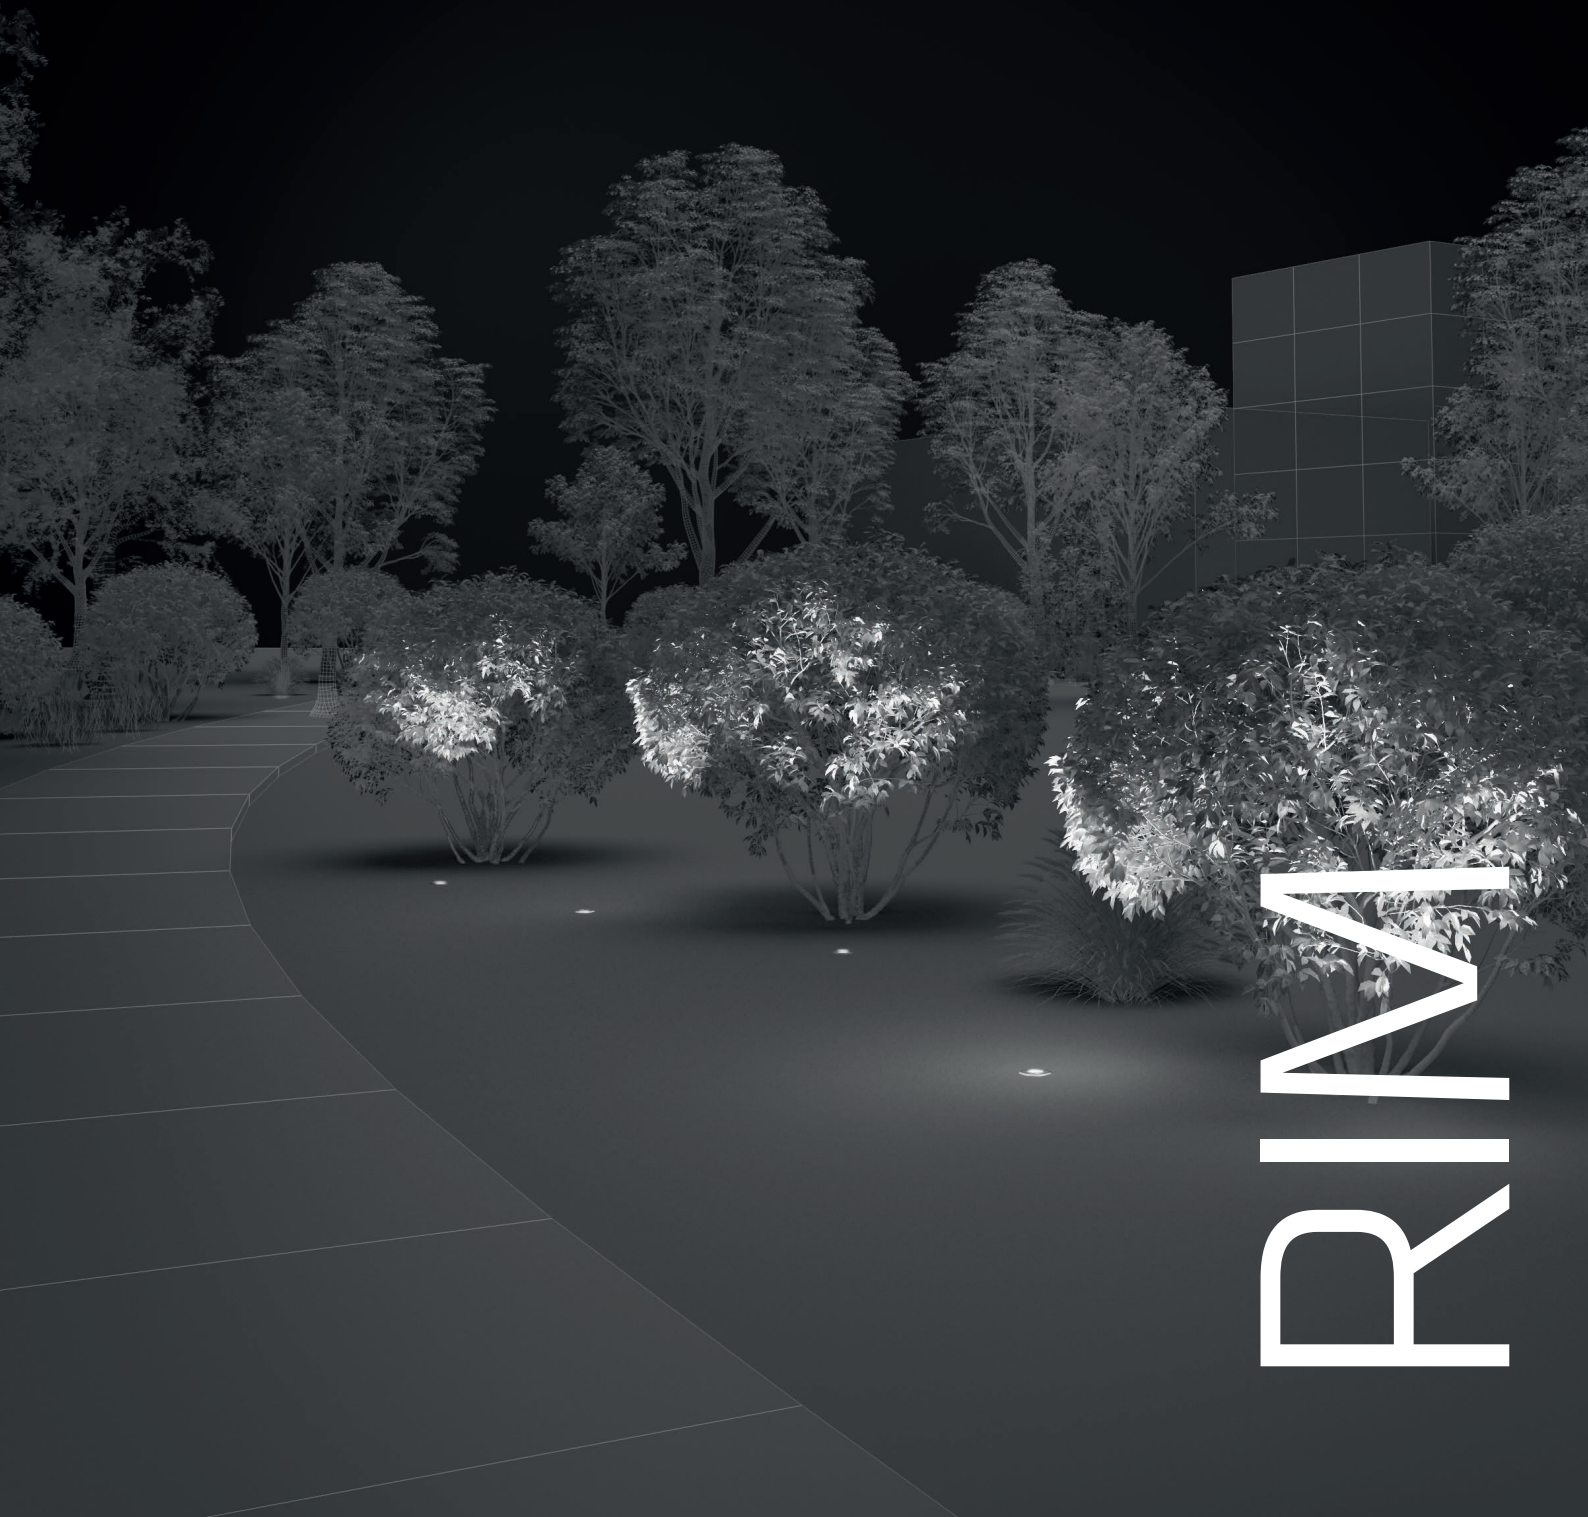

SMALL BUT
WITH BIG
TECHNIQUE

RIM collection

RIM collection

Rim, l'ultimo nato tra i calpestabili Augenti, è un **piccolo ma performante** apparecchio da incasso con anello in acciaio, proposto in **diametri da 45 mm e 70 mm**.

Le dimensioni ridotte e **l'installazione semplice e veloce** ne permettono la collocazione in ambienti esterni o interni. **Rim** può infatti essere installato a pavimento, parete o soffitto, rendendosi quasi invisibile ma facendo in modo che la luce e l'atmosfera create siano le vere protagoniste della scena. I fasci proposti sono ideali per effetti morbidi o d'accento, per installazioni singole o in serie.

L'anello in acciaio inox 316L ed il sistema AcquaStop per la protezione anti-condensa, rendono **Rim** un prodotto sicuro e poliedrico, ideale per **dare luce alla vostra fantasia**.

Rim, the last born under the walkable fixtures, is a **small but performing** recessed fixture with steel ring, proposed with **diameters of 45 mm and 70 mm**.

The reduced sizes and the **easy and quick installation** allow its positioning in external and internal areas. In fact, **Rim** can be installed on floor, wall or ceiling, turning almost invisible, but insuring the created light and atmosphere to be the real main characters of the scene.

The proposed beams are suitable for smooth or highlighted effects, for single or in-series installations. The ring of 316L stainless steel and the system AcquaStop for the anti-condensation protection make **Rim** a safe and multipurpose product, ideal **to give light to your fantasy**.

Rim, le dernier né des luminaires piétonniers, est un luminaire encastré **petit mais performant** avec anneau en acier, proposé avec des **diamètres de 45 mm et 70 mm**. Les dimensions réduites **et l'installation facile et rapide** permettent son positionnement dans les zones externes et internes. En fait, **Rim** peut être installé au sol, au mur ou au plafond, devenant presque invisible, mais assurant que la lumière et l'atmosphère créées soient les véritables personnages principaux de la scène. Les faisceaux proposés conviennent aux effets lisses ou mis en valeur, pour des installations simples ou en série. L'anneau en acier inoxydable 316L et le système AcquaStop pour la protection anti-condensation font de **Rim** un produit sûr et polyvalent, idéal pour donner **de la lumière à votre fantaisie**.



RIM

collection

AcquaStop è una speciale lavorazione all'interno del prodotto che, attraverso varie fasi di resinatura, crea una vera e propria barriera, sigillando la lampada in maniera definitiva e prevenendo quindi la formazione di condensa all'interno di essa.


AcquaStop is a special process inside product which, through different phases of resination, creates a real barrier, sealing the fixture in a definitive way and preventing the development of condensation inside.

Acquastop est un procédé spécifique à l'intérieur du produit, qui grâce à différentes mises en oeuvres de couches d'étanchéités, crée une barrière définitive à la formation de condensation à l'intérieur du luminaire.

acquaSTOP

RIM

collection

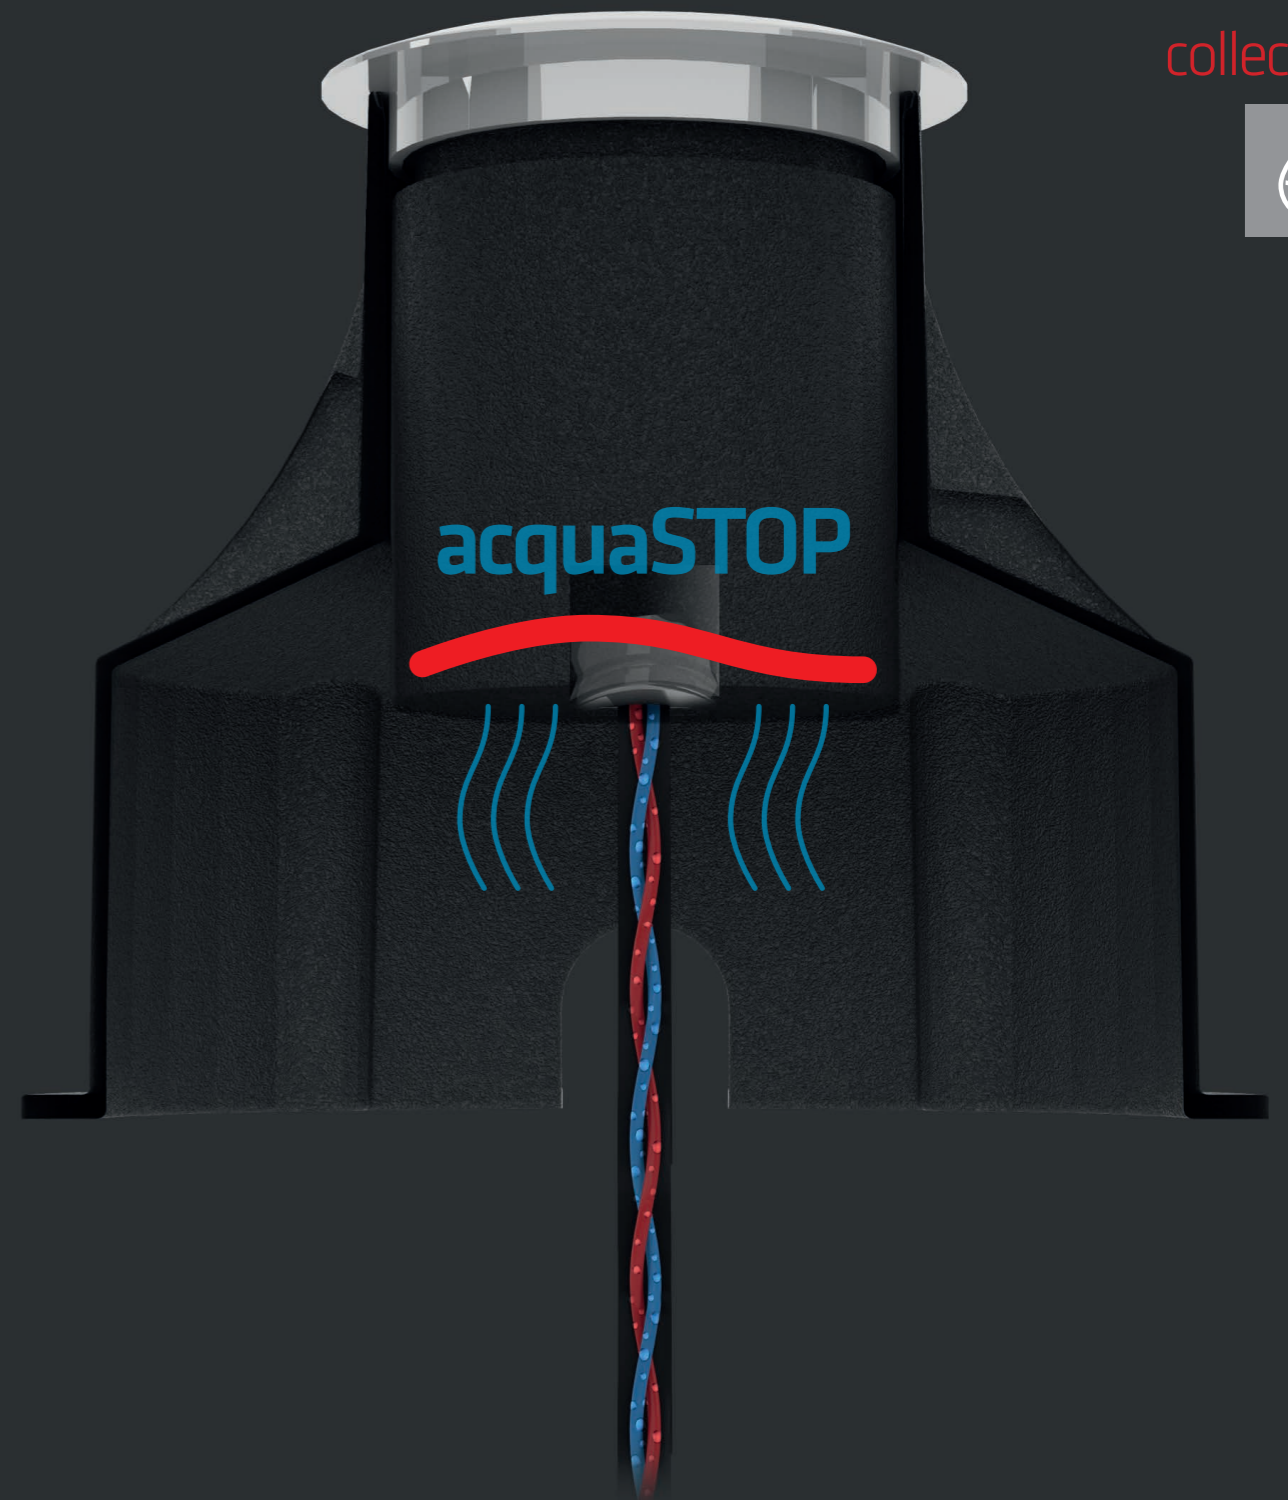



STEEL FRAME

Fixture Specifications

- Protection . IP 67 - IK 08
- Body . Polypropylene
- Frame . Steel AISI 316L
- Screen . Extra-clear transparent Glass 6mm
- Seals . EPDM rubber

RIM 45 led WHITE

Versione in Tensione - Constant voltage (Vdc)

code	beam	class	power	W	source	fixture	RCT LED	CRI
3045R /WRRCNB99	NB Spot/14°	III	24Vdc	2W	170 lm	130 lm	3000K	80
3045R /NRRCNB99	NB Spot/14°	III	24Vdc	2W	190 lm	150 lm	4000K	80
3045R /WRRCMB99	MB Flood/30°	III	24Vdc	2W	170 lm	125 lm	3000K	80
3045R /NRRCMB99	MB Flood/30°	III	24Vdc	2W	190 lm	145 lm	4000K	80
3045R /WRR CWB99	WB Wide Flood/40°	III	24Vdc	2W	170 lm	120 lm	3000K	80
3045R /NRR CWB99	WB Wide Flood/40°	III	24Vdc	2W	190 lm	140 lm	4000K	80
3045R /WRR CVS99	VS Diffuse 120°	III	24Vdc	2W	170 lm	18 lm	3000K	80
3045R /NRR CVS99	VS Diffuse 120°	III	24Vdc	2W	190 lm	20 lm	4000K	80

LED SYSTEM WITH REMOTE DRIVER 24V


Versione in Corrente - Constant current (mA)

code	beam	class	power	W	source	fixture	RCT LED	CRI
3045R /WRCCNB99	NB Spot/14°	III	700mA	2W	220 lm	170 lm	3000K	80
3045R /NRCCNB99	NB Spot/14°	III	700mA	2W	240 lm	188 lm	4000K	80
3045R /WRCCMB99	MB Flood/30°	III	700mA	2W	220 lm	165 lm	3000K	80
3045R /NRCCMB99	MB Flood/30°	III	700mA	2W	240 lm	183 lm	4000K	80
3045R /WRCCWB99	WB Wide Flood/40°	III	700mA	2W	220 lm	162 lm	3000K	80
3045R /NRCCWB99	WB Wide Flood/40°	III	700mA	2W	240 lm	180 lm	4000K	80
3045R /WRCCVS99	VS Diffuse 120°	III	700mA	2W	220 lm	25 lm	3000K	80
3045R /NRCCVS99	VS Diffuse 120°	III	700mA	2W	240 lm	28 lm	4000K	80

LED SYSTEM WITH REMOTE DRIVER max 700mA

Technical Data

- NB** FASCIO STRETTO 14° - NARROW BEAM 14°
- MB** FASCIO MEDIO 30° - MEDIUM BEAM 30°
- WB** FASCIO LARGO 40° - WIDE BEAM 40°
- VS** FASCIO DIFFUSO 120° - DIFFUSE BEAM 120°

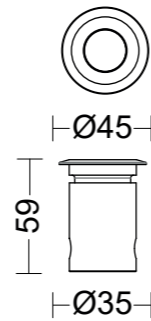

Quote espresse in millimetri "mm"
Share expressed in millimeters "mm"

Sizes . H59 x Ø35 x Ø ring 45

Versione in Tensione - Constant voltage (Vdc)

2W con DRIVER REMOTO 24Vdc - 2W REMOTE DRIVER 24Vdc

Versione in Corrente - Constant current (mA)

2W con DRIVER REMOTO MAX 700mA - 2W REMOTE DRIVER max 700mA

Specifications




Accessories

informazioni sugli accessori sul nostro sito web
information about accessories on our website

DRIVER 24Vdc / mA

HUB for electronic parts

Underground CASING



Specifications



RIM 45 light diffusion



Luminaire installation example:
Wall distance: 10cm
Wall/Ceiling height: 5mt
Distance between luminaires: 4mt

RIM

BEAM

NB

MB

WB

VS



Technical Data

- NB** FASCIO STRETTO 12° - NARROW BEAM 12°
- MB** FASCIO MEDIO 24° - MEDIUM BEAM 24°
- WB** FASCIO LARGO 36° - WIDE BEAM 36°
- VS** FASCIO DIFFUSO 120° - DIFFUSE BEAM 120°

3000K - 4000K

Versione in Tensione - Constant voltage (Vdc)
6W con DRIVER REMOTO 24Vdc - 6W REMOTE DRIVER 24Vdc

Versione in Corrente - Constant current (mA)
6W con DRIVER REMOTO MAX 500mA - 6W REMOTE DRIVER max 500mA

Specifications



Fixture Specifications

Protection . IP 67 - IK 08

Body . Polypropylene


Frame . Steel AISI 316L

Screen . Extra-clear transparent Glass 6mm

Seals . EPDM rubber



STEEL FRAME

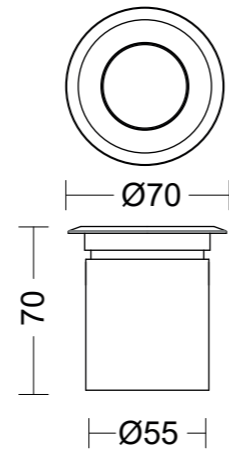

Quote espresse in millimetri "mm"
Share expressed in millimeters "mm"

Sizes . H70 x Ø55 x Ø ring 70

Versione in Tensione - Constant voltage (Vdc)

code	beam	class	power	W	source	fixture	RCT LED	CRI
3070R /WRRCNB99	NB Spot/12°	III	24Vdc	6W	690 lm	520 lm	3000K	80
3070R /NRRCNB99	NB Spot/12°	III	24Vdc	6W	750 lm	550 lm	4000K	80
3070R /WRRCMB99	MB Flood/24°	III	24Vdc	6W	690 lm	510 lm	3000K	80
3070R /NRRCMB99	MB Flood/24°	III	24Vdc	6W	750 lm	540 lm	4000K	80
3070R /WRRCWB99	WB Wide Flood/36°	III	24Vdc	6W	690 lm	505 lm	3000K	80
3070R /NRRCWB99	WB Wide Flood/36°	III	24Vdc	6W	750 lm	535 lm	4000K	80
3070R /WRRCVS99	VS Diffuse 120°	III	24Vdc	6W	690 lm	70 lm	3000K	80
3070R /NRRCVS99	VS Diffuse 120°	III	24Vdc	6W	750 lm	78 lm	4000K	80

LED SYSTEM WITH REMOTE DRIVER 24V

Versione in Corrente - Constant current (mA)

code	beam	class	power	W	source	fixture	RCT LED	CRI
3070R /WRCCNB99	NB Spot/12°	III	500mA	6W	690 lm	520 lm	3000K	80
3070R /NRCCNB99	NB Spot/12°	III	500mA	6W	750 lm	550 lm	4000K	80
3070R /WRCCMB99	MB Flood/24°	III	500mA	6W	690 lm	510 lm	3000K	80
3070R /NRCCMB99	MB Flood/24°	III	500mA	6W	750 lm	540 lm	4000K	80
3070R /WRCCWB99	WB Wide Flood/36°	III	500mA	6W	690 lm	505 lm	3000K	80
3070R /NRCCWB99	WB Wide Flood/36°	III	500mA	6W	750 lm	535 lm	4000K	80
3070R /WRCCVS99	VS Diffuse 120°	III	500mA	6W	690 lm	70 lm	3000K	80
3070R /NRCCVS99	VS Diffuse 120°	III	500mA	6W	750 lm	78 lm	4000K	80

LED SYSTEM WITH REMOTE DRIVER max 500mA




Accessories

informazioni sugli accessori sul nostro sito web
information about accessories on our website

DRIVER 24Vdc / mA

HUB for electronic parts

Underground CASING



Specifications



RIM 70 light diffusion



Luminaire installation example:
Wall distance: 10cm
Wall/Ceiling height: 5mt
Distance between luminaires: 4mt

RIM 70




BEAM

NB

MB

WB

VS

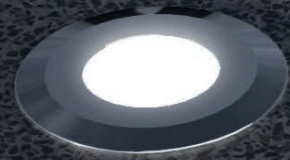

RIM 45


RIM

collection



RIM

collection

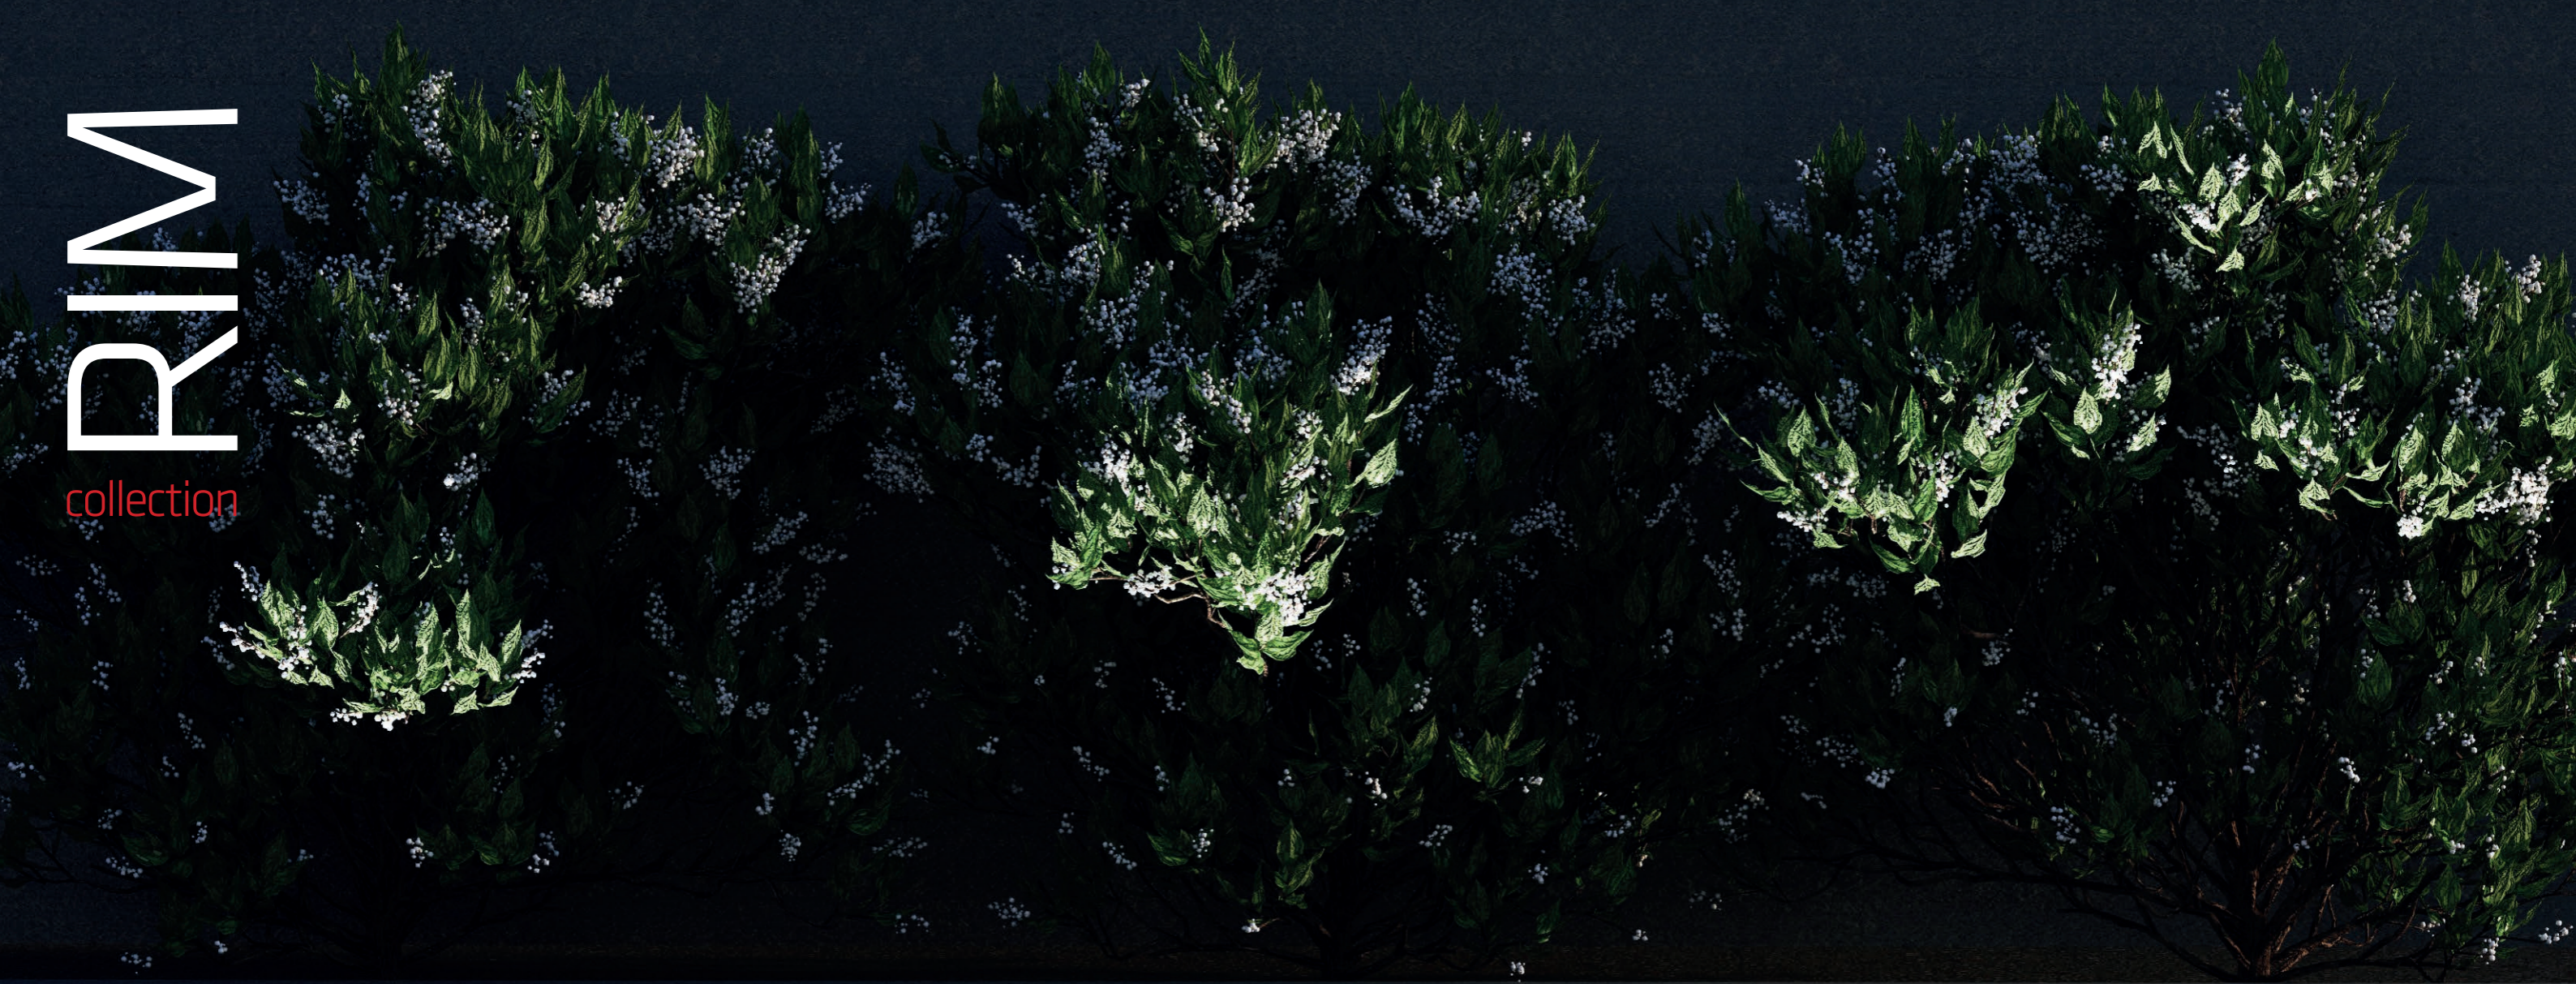

RIM

GOOD

INSTALLATION

BY **Augenti**[®]
LIGHTING DESIGN



Augenti[®]
LIGHTING



AUGENTI LIGHTING S.R.L. UNIPERSONALE

Via Francesco Lana, 31 - 25065 Lumezzane (BS) Italy - tel: (+39) 030 7282524 - fax: (+39) 030 7281879
info@augentilighting.it - www.augentilighting.it